

BRUKSANVISNING

ART.NR.: 8632901

Arbeidslampe LED 20W

Arbeidslampe LED 20W

OBS: Les følgende instruksjoner nøye for å sikre at monteringen utføres på riktig måte. Disse instruksjonene bør oppbevares på riktig måte for fremtidig referanse.

I. Tekniske data

| Type | Nominelt strømforbruk | Tilførselsstrøm | Effektfaktor | Herdet glass | Vekt | Maksimum belyst område | Dimensjoner: (H*V*D) | Merk |
|-----------|-----------------------|-----------------|--------------|-----------------|--------|------------------------|----------------------|---|
| LN3291XP | 10W | Max.0.06A | >0.7 | 113.6*89.6*4mm | 0.9Kg | 433.0cm ² | 218.7*198*143.6mm | Beskyttelsesklasse mot elektrisk støt: I Utvendig lysbeskyttelsesklasse: IP54 Lampesokkel størrelse: LED Nominell spenning: 220-240V~ 50/60Hz |
| LN3292XP | 20W | Max.0.12A | >0.7 | 153.6*121.6*4mm | 1.2Kg | 605.8 cm ² | 254*238.5*148.6mm | |
| LN3293XP | 30W | Max.0.13A | >0.9 | 202.8*160.8*4mm | 1.7Kg | 797.8cm ² | 277*288*168.5mm | |
| LN3295XP | 50W | Max.0.22A | >0.9 | 213.2*161.2*4mm | 2.1Kg | 939.6cm ² | 295*318.5*183mm | |
| LN3291XLP | 10W | Max.0.06A | >0.7 | 113.6*89.6*4mm | 0.9Kg | 433.0cm ² | 218.7*198*143.6mm | |
| LN3292XLP | 20W | Max.0.12A | >0.7 | 153.6*121.6*4mm | 1.2Kg | 605.8 cm ² | 254*238.5*148.6mm | |
| LN3293XLP | 30W | Max.0.13A | >0.9 | 202.8*160.8*4mm | 1.7Kg | 797.8cm ² | 277*288*168.5mm | |
| LN3295XLP | 50W | Max.0.22A | >0.9 | 213.2*161.2*4mm | 2.1Kg | 939.6cm ² | 295*318.5*183mm | |
| LN3291XF | 10W | Max.0.06A | >0.7 | 113.6*89.6*4mm | 1.03Kg | 419.5 cm ² | 235*178.5*161mm | |
| LN3292XF | 20W | Max.0.12A | >0.7 | 153.6*121.6*4mm | 1.33Kg | 653.6 cm ² | 304*215*197mm | |
| LN3293XF | 30W | Max.0.13A | >0.9 | 202.8*160.8*4mm | 1.86Kg | 902.2 cm ² | 347*260*197mm | |
| LN3291XLF | 10W | Max.0.06A | >0.7 | 113.6*89.6*4mm | 1.03Kg | 419.5 cm ² | 235*178.5*161mm | |
| LN3292XLF | 20W | Max.0.12A | >0.7 | 153.6*121.6*4mm | 1.33Kg | 653.6 cm ² | 304*215*197mm | |
| LN3293XLF | 30W | Max.0.13A | >0.9 | 202.8*160.8*4mm | 1.86Kg | 902.2 cm ² | 347*260*197mm | |


II. Sikkerhets instruksjoner

1. Før montering og vedlikehold, sørg for at strømforsyningen er slått av for å unngå elektrisk støt.
2. Lampen må være jordet.
3. Strømledningen må være VDE-sertifisert H07RN-F 3x1,0mm² vanntett kabel.
4. Den eksterne fleksible kabelen til denne armaturen kan ikke erstattes; hvis ledningen er skadet, skal armaturen destrueres.
5. Sjekk om stativet er stabilt og har et fast fottfeste. Sørg for at kabelen ikke berører noen skarpe gjenstander og at støpselet er tilstrekkelig beskyttet mot regn eller fuktighet. Nå er lampen klar til bruk.
6. Vær oppmerksom på at ikke berør baksiden av lampehuset mens du arbeider.
7. Armaturer for røffe forhold.
8. Begrensning av bruk innendørs eller utendørs.



FORSIKTIG: Lyskilden til denne armaturen er ikke utskiftbar når lyskilden når slutten av levetiden skal hele armaturen skiftes ut.

LN3291XP, LN3292XP, LN3293XP, LN3295XP, LN3291XLP, LN3292XLP, LN3293XLP, LN3295XLP

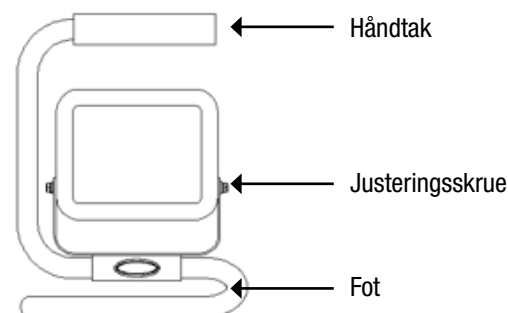

Denne merkingen indikerer at dette produktet ikke skal kastes sammen med annet husholdningsavfall i hele EU. For å forhindre mulig skade på miljøet eller menneskers helse fra ukontrollert avfallshåndtering, resirkulér det ansvarlig for å fremme bærekraftig gjenbruk av materialressurser. For å returnere din brukte enhet, vennligst bruk retur- og innsamlingssystemene eller kontakt forhandleren der produktet ble kjøpt. De kan ta dette produktet til miljøsikket resirkulering.

INSTRUCTIONS

ART.NR.: 8632901

Working lamp LED 20W

Working lamp LED 20W

Attention: Please read the following instructions carefully to ensure that mounting operation will be carried out in the right way. These instructions should be properly preserved for future reference.

I. Main construction data


| Type | Rated power | Supply current | Power factor | Tempered Glass | Weight | Maximum projected area | Dimensions: (H*W*D) | Remark |
|-----------|-------------|----------------|--------------|-----------------|--------|------------------------|---------------------|--|
| LN3291XP | 10W | Max.0.06A | >0.7 | 113.6*89.6*4mm | 0.9Kg | 433.0cm ² | 218.7*198*143.6mm | Electric shock protection class: I External light protection class: IP54 Lamp socket size:LED Rated voltage: 220-240V~50/60Hz |
| LN3292XP | 20W | Max.0.12A | >0.7 | 153.6*121.6*4mm | 1.2Kg | 605.8 cm ² | 254*238.5*148.6mm | |
| LN3293XP | 30W | Max.0.13A | >0.9 | 202.8*160.8*4mm | 1.7Kg | 797.8cm ² | 277*288*168.5mm | |
| LN3295XP | 50W | Max.0.22A | >0.9 | 213.2*161.2*4mm | 2.1Kg | 939.6cm ² | 295*318.5*183mm | |
| LN3291XLP | 10W | Max.0.06A | >0.7 | 113.6*89.6*4mm | 0.9Kg | 433.0cm ² | 218.7*198*143.6mm | |
| LN3292XLP | 20W | Max.0.12A | >0.7 | 153.6*121.6*4mm | 1.2Kg | 605.8 cm ² | 254*238.5*148.6mm | |
| LN3293XLP | 30W | Max.0.13A | >0.9 | 202.8*160.8*4mm | 1.7Kg | 797.8cm ² | 277*288*168.5mm | |
| LN3295XLP | 50W | Max.0.22A | >0.9 | 213.2*161.2*4mm | 2.1Kg | 939.6cm ² | 295*318.5*183mm | |
| LN3291XF | 10W | Max.0.06A | >0.7 | 113.6*89.6*4mm | 1.03Kg | 419.5 cm ² | 235*178.5*161mm | |
| LN3292XF | 20W | Max.0.12A | >0.7 | 153.6*121.6*4mm | 1.33Kg | 653.6 cm ² | 304*215*197mm | |
| LN3293XF | 30W | Max.0.13A | >0.9 | 202.8*160.8*4mm | 1.86Kg | 902.2 cm ² | 347*260*197mm | |
| LN3291XLF | 10W | Max.0.06A | >0.7 | 113.6*89.6*4mm | 1.03Kg | 419.5 cm ² | 235*178.5*161mm | |
| LN3292XLF | 20W | Max.0.12A | >0.7 | 153.6*121.6*4mm | 1.33Kg | 653.6 cm ² | 304*215*197mm | |
| LN3293XLF | 30W | Max.0.13A | >0.9 | 202.8*160.8*4mm | 1.86Kg | 902.2 cm ² | 347*260*197mm | |

II. Safety instructions

1. Before mounting and maintenance please make sure that the electrical supply has been switched off to avoid electric shock.
2. The lamp must be earthed.
3. The power cord must be VDE-certified H07RN-F 3x1.0mm² waterproof cable.
4. The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
5. Check if the stand is stable and it has a firm footing. Ensure cable is not touching any sharp objects and the mains plug connector is adequately protected against rain or moisture. Now your lamp is ready for use.
6. Please pay attention to that do not touch the back of lampbody while working.
7. Luminaires for rough service.
8. Limitation of use indoors or outdoors.

CAUTION: The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire shall be replaced.

LN3291XP, LN3292XP, LN3293XP, LN3295XP, LN3291XLP, LN3292XLP, LN3293XLP, LN3295XLP

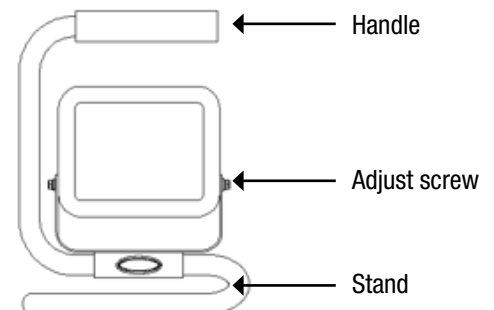

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.