



## Technical Data Sheet

### U-E20-Wall Shim thickness 2mm

#### COMPONENTS

The U-E20-Wall is composed of 1 piece.

#### CHARACTERISTICS

Weight: 0,043 kg

Length: 175 mm

Thickness: 2mm

#### MATERIAL

Material: SBR

Hardness Shore A Din 53505: 60-80 SHA

Color: Black

Density: 1,55 g/cm<sup>3</sup>

Temperature range: (-30) +/- 70 °C

Tensile Strength Din 53504: 3 Mpa

Elongation at break DIN 53504: 250%

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

#### PACKAGING

Pieces per carton: 240 pcs


Carton weight: 10,54 kg

Carton dimension: 370 x 195 x 120 mm

Cartons per pallet: 108 pcs

Pieces per pallet: 25 920 pcs

Pallet dimensions: 80 x 120 x 120 cm

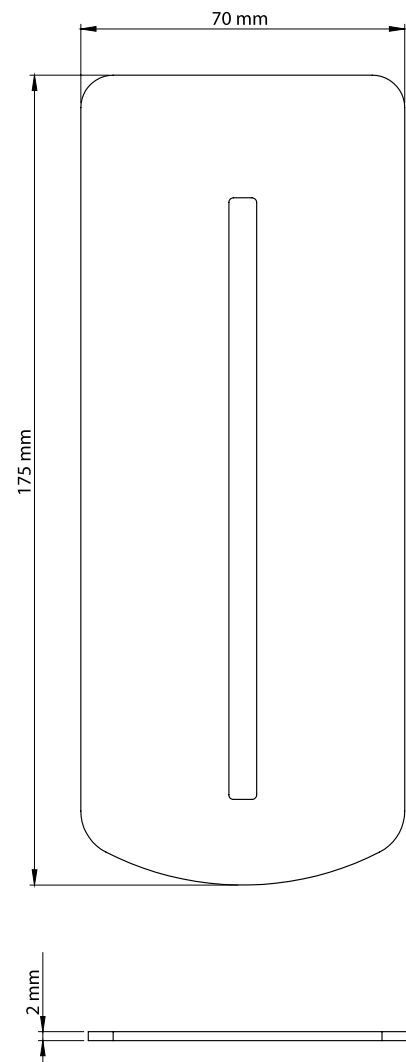

#### APPLICATIONS

The **U-E20 Wall** is a 2 mm shim. Placed on the U-Wall support, it stabilises the paver, provides additional acoustic comfort, and compensates for variations in paver thickness.

#### SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

